


INSTRUCTIONS

LT-SH-19-WLT704 (all finishes)

Lamp Type: 4 X G9. Maximum Lamp Rating: 3W LED Only (lamps not supplied). Supply: 220-240V~50Hz

IMPORTANT! Please read these instructions fully before installation and retain them for future reference. Incorrect installation may invalidate the warranty. Refer to reverse of these instructions to understand all symbols.

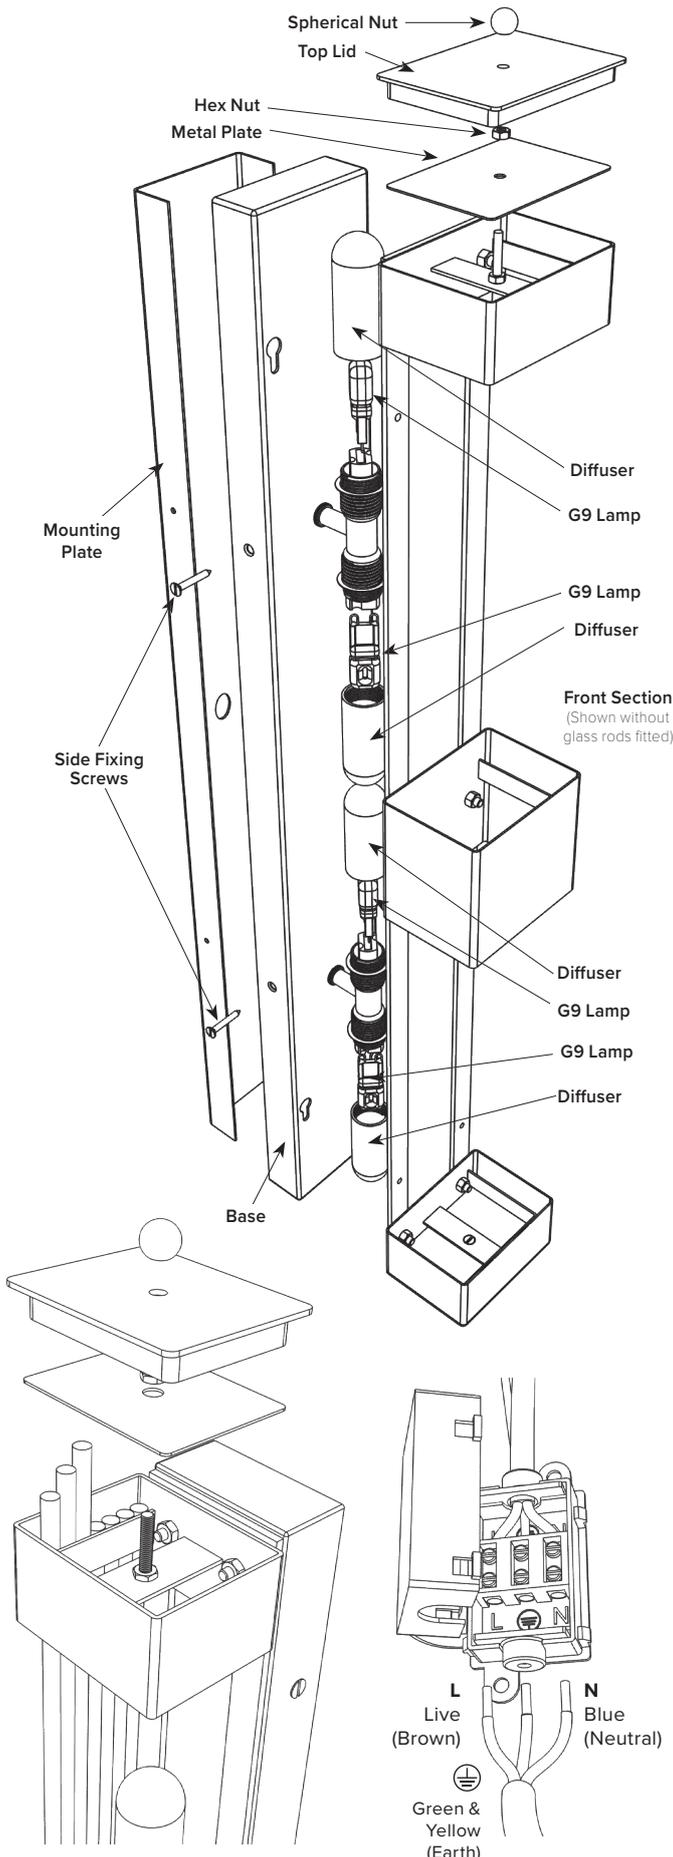

SAFETY WARNINGS

WARNING: Electric shock hazard. Always isolate the electrical supply at the mains before installation, adjustment, or maintenance, either by removing the fuse or turning off the circuit breaker. Turning the power off using the light switch is insufficient protection against electric shock.

- This luminaire must be installed by an experienced professional in accordance with current wiring regulations.
- This luminaire must be earthed.
- Do not exceed the maximum stated lamp wattage.
- Do not use the product if any part appears damaged. Refer to the retailer.
- Plastic bags can be dangerous. To avoid danger of suffocation, keep packaging away from babies and children.
- Dispose of packaging responsibly.

These important safeguards and instructions are not meant to cover all possible conditions or situations that may occur. It must be understood that common sense, caution, and care, are factors that must be supplied by the person(s) installing this product.

NOTE: This luminaire is suitable for directly mounting on normally flammable surfaces such as wood.

INSTALLATION INSTRUCTIONS

1. Isolate the mains electrical supply.
2. Remove the Front Section by gently sliding it in the direction of the top of the luminaire (as indicated by the red arrow sticker on the back of the product) to release the fittings from the keyhole slots.
3. Carefully remove the Glass Rods from the packaging and wipe clean.
4. Open the Top Lid of the Front Section of the luminaire, by unscrewing the Spherical Nut. Unscrew the second Hex Nut to remove the internal Metal Plate (using a 7mm spanner and set them both to one side before gently inserting the Glass Rods as shown in the bottom left illustration. It is recommended that this is performed before the Front Section is fitted to the Base and is easier in a horizontal orientation, such as on a table top. This procedure should be carried out carefully and slowly wearing gloves as the Glass Rods are very delicate.
5. Position the internal Metal Plate above the newly fitted rods and re-fit the Hex Nut. Replace the Top Lid and fix in place using the Spherical Nut.
6. Carefully dis-assemble the Base by removing the four Side Fixing Screws to separate the Base from the Mounting Plate.
7. Secure the Mounting Bracket to a suitable wall/surface through the four Rear Fixing Holes, using appropriate fixings for the substrate and weight of the light (fixings supplied may not be suitable for all surfaces). The power supply will need to be fed through the centre hole of the Mounting Plate.
8. Connect the supply cable to the terminal block as follows, ensuring all connections are secure. Live (L): Brown, Neutral (N): Blue, Earth (\perp): Green/Yellow. You may need assistance of somebody to hold the light unit during the connection procedure.
9. Fix the Base to the Mounting Bracket using the four Side Fixing Screws, NOTE: the correct orientation is with the narrow end of the four key slots pointing downwards, (see illustration to the left) and the red arrow sticker pointing upwards.
10. Fit four suitable G9 lamps as detailed below.
11. To fit the Front Section to the Base on the wall, first ensure you have it in the correct orientation with the red arrow sticker pointing upwards, align & hook the rear fixings into the wider part of the keyhole slot, then gently slide downwards into place.
12. Restore the mains supply and test the luminaire.

G9 LAMP INSTALLATION / REPLACEMENT

IMPORTANT: Ensure the power supply is switched off and the lamp has fully cooled before installing or replacing the lamp.

1. To insert a G9 LED lamp (max. 3W) into the lamp holder socket, align the two pins on the base of the G9 lamp with the slots in the socket, carefully insert the lamp into the socket, applying gentle pressure until it is fully seated.
2. Gently screw on the Diffuser to cover the lamp.

WARNING: The lamp may become hot during operation. Allow sufficient cooling time before handling.

MAINTENANCE

Clean with a soft, dry cloth only. Do not use abrasive cleaners or solvents. Replace lamps only with the specified type and rating.

DISPOSAL

This product and its light source should not be disposed of with household waste. Dispose of electrical products responsibly in accordance with local regulations.

Additional information
can be found at sohlighting.com
or on request via email: info@sohlighting.com

THE SOHO LIGHTING CO.





GENERAL SAFETY INFORMATION

WARNING! Danger of electric shock!

Defective electrical installation may cause electric shock.



Electrical installations of products with connection terminals for installation on the mains connection line are to be performed by an electrician! Please note! Before proceeding with any electrical installation, the mains connecting cable must be de-energized (fuse turned off). Please note the following symbols and safety information in order to avoid damage caused by incorrect assembly or use:

Changes: Do not make any changes to the lamp or its connecting cable. Unless specified otherwise.

Commissioning: Do not operate product if any cable or connecting cable show visible signs of damage.

Changing illuminant (lamp/bulb): Before replacing the illuminant ensure that the light is not live! Lights and illuminants may become hot in operation. Allow them to cool before a change. Use only the illuminant specified on the light. The maximum power per illuminant may not be exceeded. Also, if applicable, the prescribed illuminant type must be observed.

Care advice: Only clean product when turned off, do not allow any moisture into connecting areas or on current-carrying parts. Cleaning agents may cause staining.

	Protection class 1: For products with this symbol connect the mains supply side with the yellow/green (earth) protective conductor to the protective earth terminal.		The product conforms to required CE standards.
	Protection class 2: For products with this symbol no protective conductor is necessary for safe operation.		The LED light source cannot be replaced.
	Protection class 3: Only operate products with this symbol with Safety Extra Low Voltage (SELV). Only connect to SELV circuits.		The control gear cannot be replaced.
	Minimum distance: This symbol explains the minimum distance of the illuminant to the illuminated, normally flammable surface.		The light source can only be replaced by a professional.
	Luminaire not suitable for covering with thermally insulated material: Follow the minimum clearance distance guidance in the instructions. WARNING: RISK OF OVERHEATING OR FIRE IF THE CLEARANCE IS COMPROMISED.		The LED light source can only be replaced by a professional.
	WEEE Waste Disposal: To ensure products are recycled without hazard to the environment, DO NOT dispose of electrical or electronic products carrying this symbol as household waste. Contact your local council for collection and recycling schemes in your area.		The control gear can only be replaced by a professional.
	Recessed luminaire not suitable for mounting in normally flammable surfaces: Do not install products with this symbol on flammable/combustible surfaces.		The light source can be replaced by an end user.
	Replace any cracked protective shield/glass: Check product and replace any cracked protective shield/glass.		The LED light source can be replaced by an end user.
	Indoor use only: This symbols means the product has no protection against ingress of water. Only install in dry, closed indoor locations.		The control gear can be replaced by an end user.
	Luminaire only designed to be used with GU10 LED, self-shielded tungsten halogen or self-shielded metal halide lamp.		This product contains (a) light source(s) of energy efficiency class A, B, C, D, E, F or G depending on which letter is displayed.
	Warning electrical shock.	IP44	Ingress Protection: Protected against solid objects greater than 1mm in size. Protected against water splashing from any angle. Product is suitable for bathroom zones 2 & 3.
	Caution: Observe warnings and safety information.	IP65	Ingress Protection: Protected against access to hazardous parts. Dust-tight. Protected against powerful water jets from any angle. Product is suitable for outdoor and bathrooms.
	The product conforms to required UKCA standards.	IP68	Ingress Protection: Protected against access to hazardous parts. Dust-tight. Product protected against submersion as specified, e.g. continuous submersion, up to 3M.