THE SOHO LIGHTING CO.

MT-LTS509 - 9 Gang Dimming Toggle Switch with Enkin IDM250 - Classic

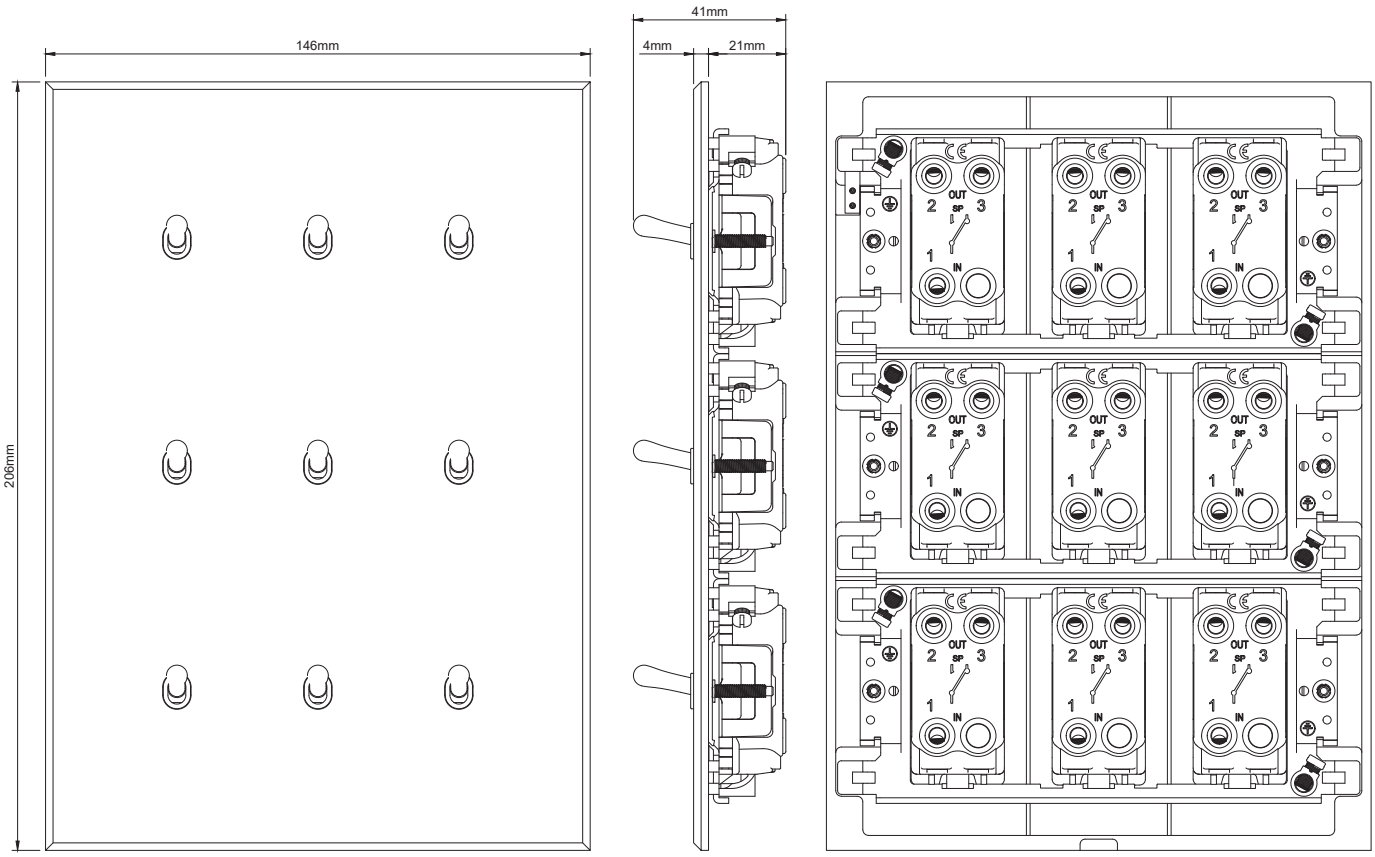

IMPORTANT NOTE: Recommended mounting box depth 47mm



POWERED BY ENKIN

Contents

MP-GRD158	9 Gang TM Module Grid Switch Face Plate + Grid Frames
MT-SGP314	20A 2 Way Retractive TM Grid Toggle Mod - Classic X 9
Enkin IDM250	Enkin 250W Intelligent In-Line Dimmer Module X 9
Trademarks	The Soho Lighting Company is a registered trade mark number: UK00003313349, EU017906396, Date: 25 May 2018

All products listed conform to current British or European standard and the product information is correct at the time of going to press. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.

Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.

The Soho Lighting Company. Registered in England Number: 10797307. Copyright © 2018 All Rights Reserved.

Carbon Neutral Organisation

LIAQA ASSURED COMPANY

A COLLABORATION WITH:

HISTORIC ROYAL PALACES

THE SOHO LIGHTING CO.

MP-GRD158 - 9 Gang TM Module Grid Switch Face Plate + Grid Frames

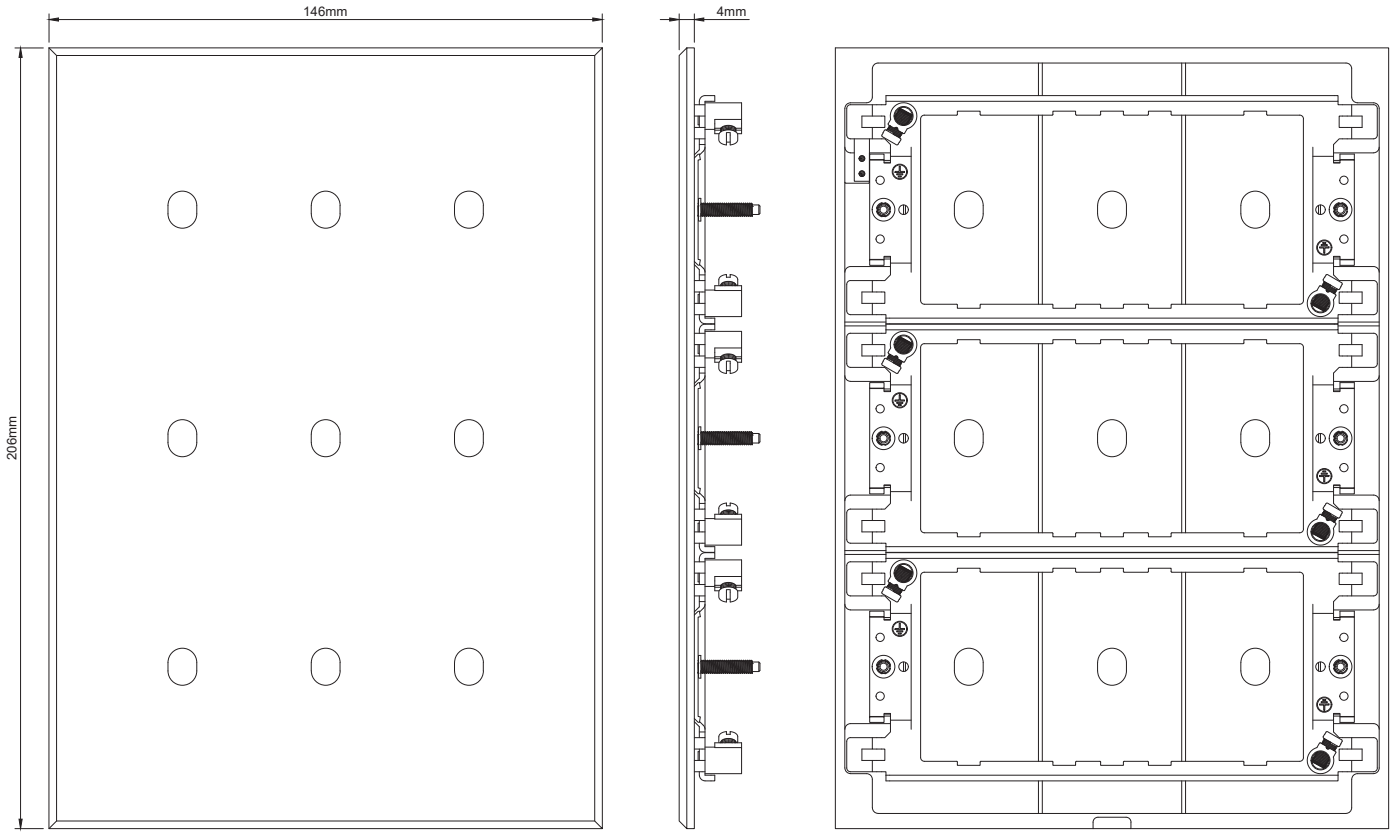

TECHNICAL SPECIFICATION

Standard(s)	BS 5733 (Where Applicable)
Mounting Box Depth (Min)	35mm
Earth Terminal Capacity	3 x 2.5mm^2, 2 x 4.0mm^2, 1 x 6.0mm^2 (EARTH)
Fixing Centres	120.6mm
Size	206mm x 146mm x 4mm (Plate thickness)
Product Class 1	Product must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
IP Rating	IP2XD
Trademarks	The Soho Lighting Company is a registered trade mark number: UK00003313349, EU017906396, Date: 25 May 2018

All products listed conform to current British or European standard and the product information is correct at the time of going to press. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.

Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.

The Soho Lighting Company. Registered in England Number: 10797307. Copyright © 2018 All Rights Reserved.

Carbon Neutral Organisation

LIAQA ASSURED COMPANY

A COLLABORATION WITH:

HISTORIC ROYAL PALACES

THE SOHO LIGHTING CO.

MT-SGP314 - 20A 2 Way Retractive TM Grid Toggle Module - Classic

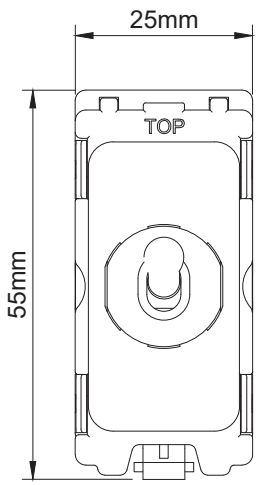

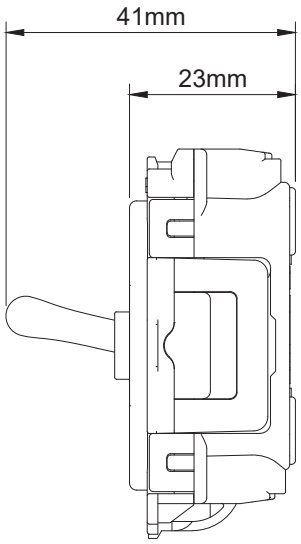

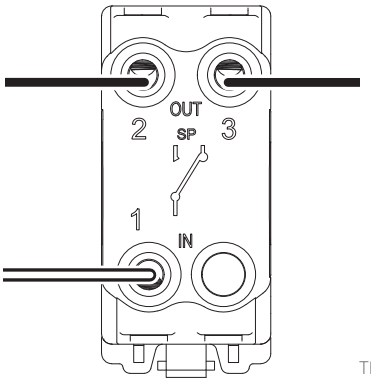

THIS MODULE MUST BE FITTED TO AN EARTHED FACE PLATE

TECHNICAL SPECIFICATION

Standard(s)	BS EN 60669-1
Voltage Rating	20 Amp, 250V~
Contact Gap	Normal Gap
Mounting Box Depth (Min)	35mm
Terminal Capacity	4x 1.5mm^2, 2x 2.5mm^2 & 1x 4.0mm^2
Size	55mm x 25mm x 41mm
Product Class 1	Product must be fitted to an earthed faceplate
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
IP Rating	IP2XD
Switched Poles	Single
Mains Frequency	50hz - 60hz
Contact Gap Minimum	3mm
Trademarks	The Soho Lighting Company is a registered trade mark number: UK00003313349, EU017906396, Date: 25 May 2018

All products listed conform to current British or European standard and the product information is correct at the time of going to press. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.

Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.

The Soho Lighting Company. Registered in England Number: 10797307. Copyright © 2018 All Rights Reserved.

Carbon Neutral Organisation

LIAQA ASSURED COMPANY

A COLLABORATION WITH:

HISTORIC ROYAL PALACES

IDM250

Enkin 250W Intelligent In-Line Dimmer Module

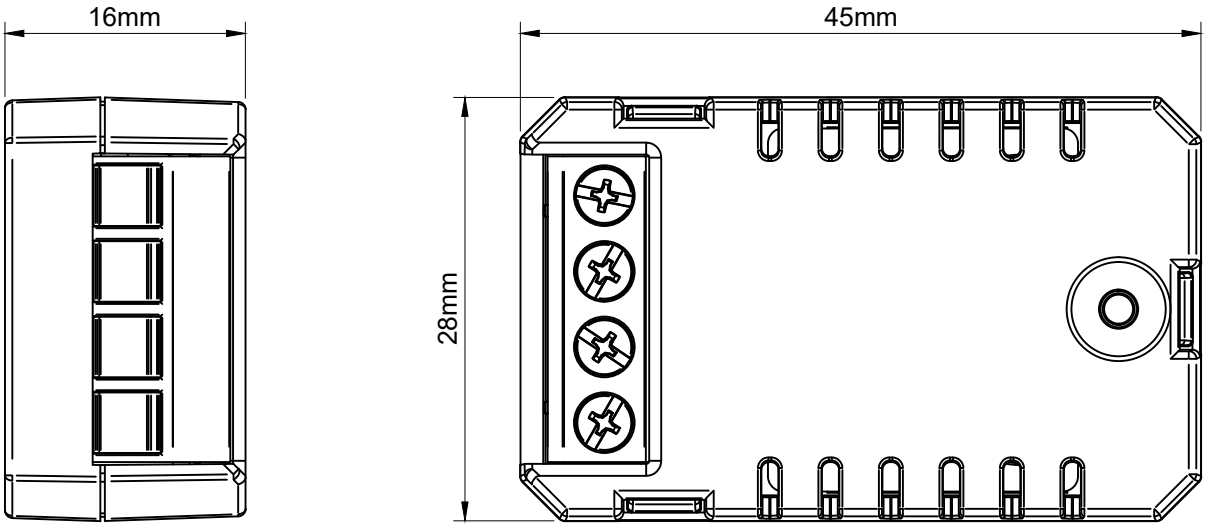

Markings & Standard(s)	CE, UKCA, BS EN 60669-2-1
Operating Voltage	220-240V AC
Main Frequency	50Hz
Minimum Load	2W LED (2W Incandescant / Halogen)
Maximum Load	250W LED (250W Incandescant / Halogen)
Switch Type	Multi-way (Retractive switch)
Dimming Protocol	Trailing edge & leading edge phase control
Mounting Box Depth (Min)	35mm
Terminal Capacity	1 x 4mm2 / 1 x 2.5mm2 / 3 x 1.5mm2 / 4 x 1mm2
Terminal Markings	L (Load), 1, 2, C (Live)
Neutral Required	No
Short Circuit Protection	Yes
Overload/Overcurrent Protection	Yes
Thermal Protection	Yes - Thermal resettable fuse
Soft Start	Yes
Power Failure	Previous state recall
Memory	Non volatile
Min/Max Level Setting	Yes - Following a defined procedure
Driving Mode	Yes - TE & LE mode Change following a defined procedure
Product Dimensions	48mm x 28mm x 15.9mm
Climate Range	0°C to 40°C, Humidity 0% to 95% non-condensing
Recommended Location	Indoor use only
Maximum Installation Altitude	2000m
IP Rating	IP2XD
Trademarks	Enkin is a registered trademark and trading name of Trade Ivy Ltd. Registered in England Number: 10809945. Copyright © 2024

ENKIN®

IDM250

Enkin 250W Intelligent In-Line Dimmer Module

Operating Voltage	240V ac
Nominal Operating Frequency	50 Hz
Dimming Technique	Trailing & leading edge phase control
Compliance	BS EN 60669-2-1

Load Symbol	Compatible Loads	Max Load	Min Load
	Dimmable LED lighting	250W TE 100W LE	2W
	240V Incandescent & Halogen lamps	250W TE 100W LE	2W
	Low voltage lighting with electronic transformers	250W TE 100W LE	2W

Multi-Gang Switch De-Rating Chart				
1 Gang	**2 Gang**	**3 Gang**	**4 Gang**	**5 Gang**
250W	212W	175W	137W	100W

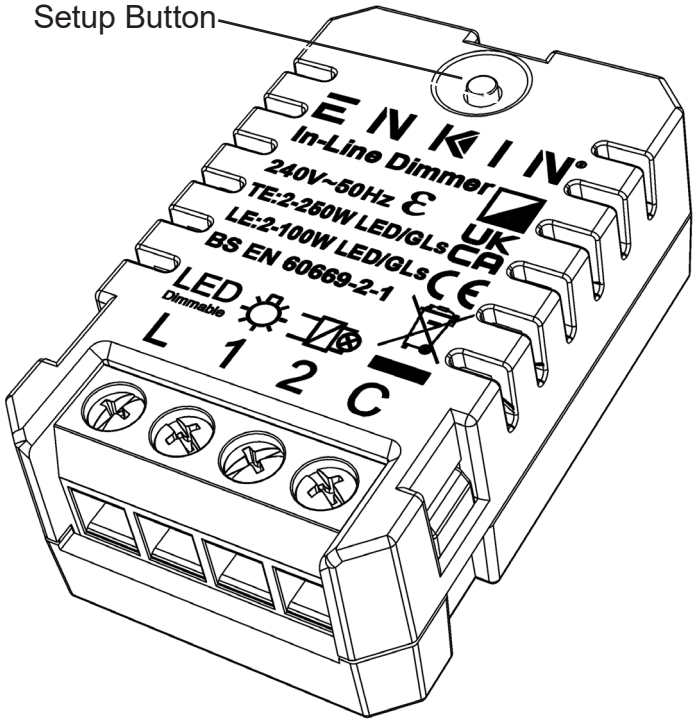

WIRING EXAMPLES

WIRING DIAGRAM

Single Retractive Switch

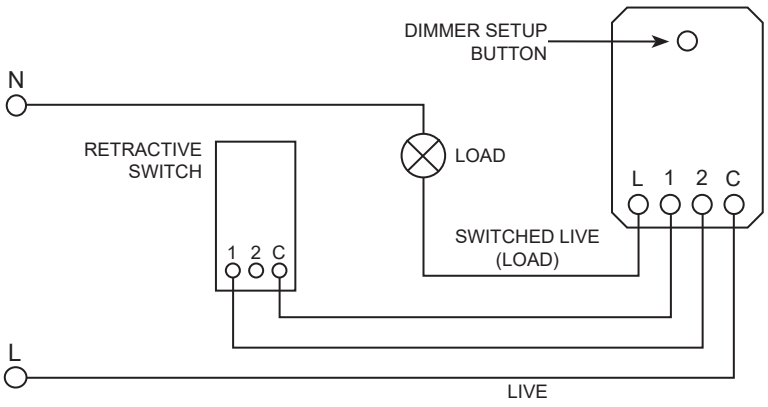

WIRING DIAGRAM

Multiple Retractive Switches

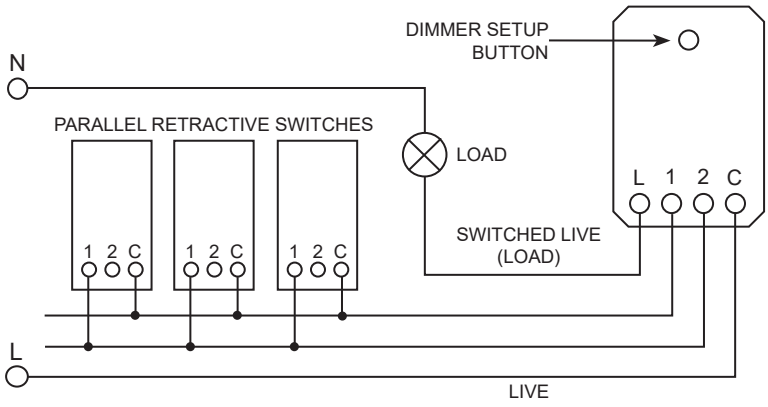

OPERATING INSTRUCTIONS

On/Off and dimming is achieved with a connected retractive switch, or multiple (parallel) retractive switches, please refer to example circuit diagrams on the other side of this document for details.

A fast click of the retractive switch will turn the lamp (or Load) on and off, holding the switch will alternately dim the lamp up or down, release the switch when desired lamp brightness has been achieved.

NOTE: This product is supplied with a minimum level already set, if this does not work well with your situation, please perform a Factory Reset before setting a minimum level to suit your setup.

The minimum/maximum level and dimming mode can be manually adjusted by following the procedures below.

SETTING THE MINIMUM LEVEL

1. Whilst on, adjust dimmer to your desired minimum brightness.

2. Push the setup button 3 times within 2 seconds.

3. The LEDs will step up and down in brightness once to confirm the setting has been saved.

SETTING THE MAXIMUM LEVEL

1. Whilst on, adjust dimmer to your desired maximum brightness.

2. Push the setup button 5 times within 3 seconds.

3. The LEDs will step up and down in brightness once to confirm the setting has been saved.

FACTORY RESET FOR MIN/MAX BRIGHTNESS

Please note this factory reset will reset all the min and max brightness settings.

1. Whilst on, push the rear setup button 7 times within 5 seconds.

2. The LEDs will step up and down in brightness three times to confirm that the min/max setting has been cleared.

CHANGING THE DIMMING MODE

The default mode of the dimmer is Trailing Edge, but it can be put into Leading Edge if required. Please ensure that you know the correct mode for your lamp.

1. Whilst on, push the setup button 9 times within 5 seconds.

2. The LEDs will step up and down in brightness twice to confirm the setting has been changed to Leading Edge mode.

NOTE:

To switch back to Trailing Edge mode, just repeat the process again, the LEDs will step up and down once to show the dimmer is back in Trailing Edge mode.