


INSTRUCTIONS

18-WLT603 Pimlico Double GU10 Spotlight/Task Light

Bulb Fitting: GU10 x 2, Max. 8W LED Only, 220-240V~50Hz

IMPORTANT! Please read these instructions fully before installation and retain them for future reference. Incorrect installation may invalidate the warranty. Refer to reverse of these instructions to understand all symbols.

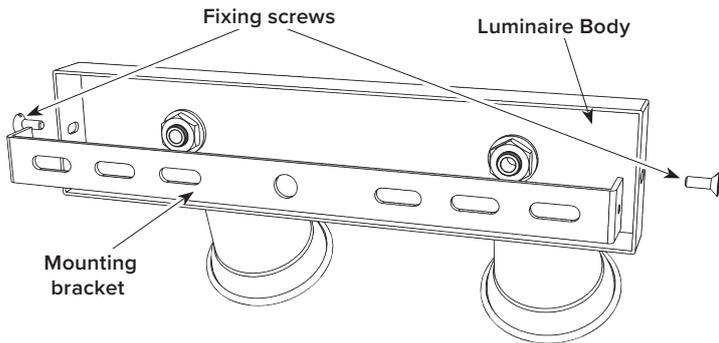

SAFETY WARNINGS


WARNING: Electric shock hazard. Always isolate the electrical supply at the mains before installation, adjustment, or maintenance, either by removing the fuse or turning off the circuit breaker. Turning the power off using the light switch is insufficient protection against electric shock.

- This luminaire must be installed by an experienced professional in accordance with current wiring regulations.
- This luminaire must be earthed.
- Do not exceed the maximum stated lamp wattage.
- Do not use the product if any part appears damaged. Refer to the retailer.
- Plastic bags can be dangerous. To avoid danger of suffocation, keep packaging away from babies and children. Dispose of packaging responsibly.

NOTE: These important safeguards and instructions are not meant to cover all possible conditions or situations that may occur. It must be understood that common sense, caution, and care, are factors that must be supplied by the person(s) installing this product.

INSTALLATION INSTRUCTIONS

1. Isolate the mains electrical supply.
2. Secure the mounting bracket to a suitable wall or surface using appropriate fixings for the substrate (fixings supplied may not be suitable for all surfaces).
3. Connect the supply cable to the terminal block as follows, ensuring all connections are secure. Live (L): Brown, Neutral (N): Blue, Earth (⊕): Green/Yellow.
4. Fix the luminaire body to the mounting bracket using the two fixing screws provided.
5. After fitting suitable GU10 lamps as detailed below, restore the mains supply and test the luminaire.

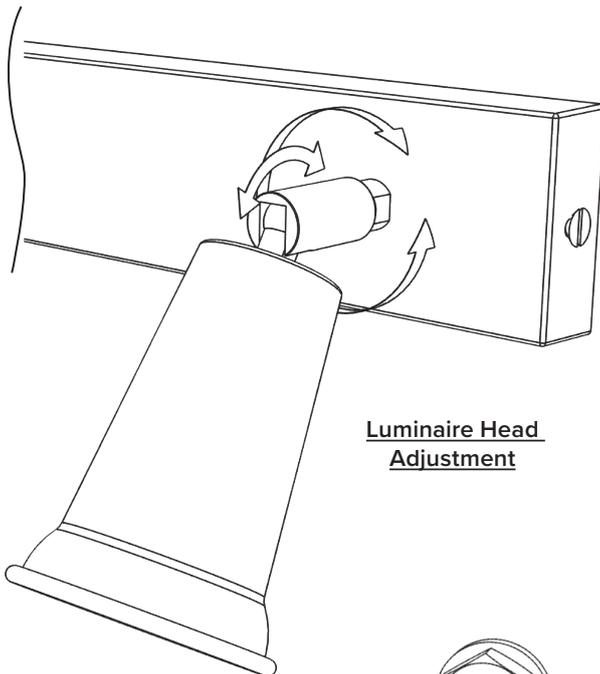

Luminaire Head Adjustment

GU10 LAMP INSTALLATION / REPLACEMENT

IMPORTANT: Ensure the power supply is switched off and the lamp has fully cooled before installing or replacing the lamp.

1. Insert a GU10 LED lamp (max. 8W) into each lampholder.
2. Push the lamps fully in and rotate clockwise until they lock into position.
3. To remove a lamp, rotate anti-clockwise and withdraw.

WARNING: The lamp may become hot during operation. Allow sufficient cooling time before handling.

ADJUSTING THE LIGHT

The luminaire heads are adjustable to allow directional control of the light output.

1. Hold the luminaire head firmly.
2. Gently tilt the head up or down to the desired angle.
3. Rotate the head left or right as required (see adjustment diagram).
4. Adjust only within the natural stopping points of the mechanism.


IMPORTANT: Do not force the luminaires beyond their adjustment limit, as this may cause damage.

MAINTENANCE

- Clean with a soft, dry cloth only.
- Do not use abrasive cleaners or solvents.
- Replace lamps only with the specified type and rating.

DISPOSAL

This product and its light source should not be disposed of with household waste. Dispose of electrical products responsibly in accordance with local regulations.

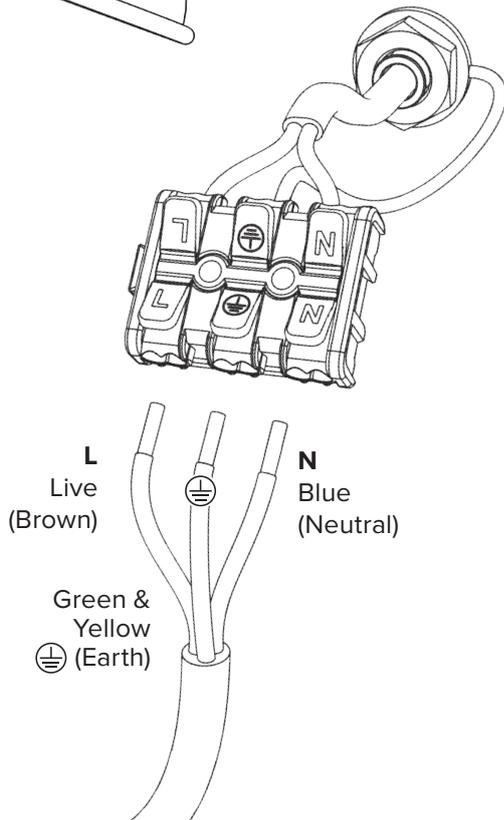

Additional information
can be found at sohlighting.com
or on request via email: info@sohlighting.com





GENERAL SAFETY INFORMATION

WARNING! Danger of electric shock!

Defective electrical installation may cause electric shock.



Electrical installations of products with connection terminals for installation on the mains connection line are to be performed by an electrician! Please note! Before proceeding with any electrical installation, the mains connecting cable must be de-energized (fuse turned off). Please note the following symbols and safety information in order to avoid damage caused by incorrect assembly or use:

Changes: Do not make any changes to the lamp or its connecting cable. Unless specified otherwise.

Commissioning: Do not operate product if any cable or connecting cable show visible signs of damage.

Changing illuminant (lamp/bulb): Before replacing the illuminant ensure that the light is not live! Lights and illuminants may become hot in operation. Allow them to cool before a change. Use only the illuminant specified on the light. The maximum power per illuminant may not be exceeded. Also, if applicable, the prescribed illuminant type must be observed.

Care advice: Only clean product when turned off, do not allow any moisture into connecting areas or on current-carrying parts. Cleaning agents may cause staining.

	Protection class 1: For products with this symbol connect the mains supply side with the yellow/green (earth) protective conductor to the protective earth terminal.		The product conforms to required CE standards.
	Protection class 2: For products with this symbol no protective conductor is necessary for safe operation.		The LED light source cannot be replaced.
	Protection class 3: Only operate products with this symbol with Safety Extra Low Voltage (SELV). Only connect to SELV circuits.		The control gear cannot be replaced.
	Minimum distance: This symbol explains the minimum distance of the illuminant to the illuminated, normally flammable surface.		The light source can only be replaced by a professional.
	Luminaire not suitable for covering with thermally insulated material: Follow the minimum clearance distance guidance in the instructions. WARNING: RISK OF OVERHEATING OR FIRE IF THE CLEARANCE IS COMPROMISED.		The LED light source can only be replaced by a professional.
	WEEE Waste Disposal: To ensure products are recycled without hazard to the environment, DO NOT dispose of electrical or electronic products carrying this symbol as household waste. Contact your local council for collection and recycling schemes in your area.		The control gear can only be replaced by a professional.
	Recessed luminaire not suitable for mounting in normally flammable surfaces: Do not install products with this symbol on flammable/combustible surfaces.		The light source can be replaced by an end user.
	Replace any cracked protective shield/glass: Check product and replace any cracked protective shield/glass.		The LED light source can be replaced by an end user.
	Indoor use only: This symbols means the product has no protection against ingress of water. Only install in dry, closed indoor locations.		The control gear can be replaced by an end user.
	Luminaire only designed to be used with GU10 LED, self-shielded tungsten halogen or self-shielded metal halide lamp.		This product contains (a) light source(s) of energy efficiency class A, B, C, D, E, F or G depending on which letter is displayed.
	Warning electrical shock.	IP44	Ingress Protection: Protected against solid objects greater than 1mm in size. Protected against water splashing from any angle. Product is suitable for bathroom zones 2 & 3.
	Caution: Observe warnings and safety information.	IP65	Ingress Protection: Protected against access to hazardous parts. Dust-tight. Protected against powerful water jets from any angle. Product is suitable for outdoor and bathrooms.
	The product conforms to required UKCA standards.	IP68	Ingress Protection: Protected against access to hazardous parts. Dust-tight. Product protected against submersion as specified, e.g. continuous submersion, up to 3M.