THE SOHO LIGHTING CO.

MP-SKT221 - 1 Gang 13A DP Switched Socket + 2 USB C+C 3.1Amp

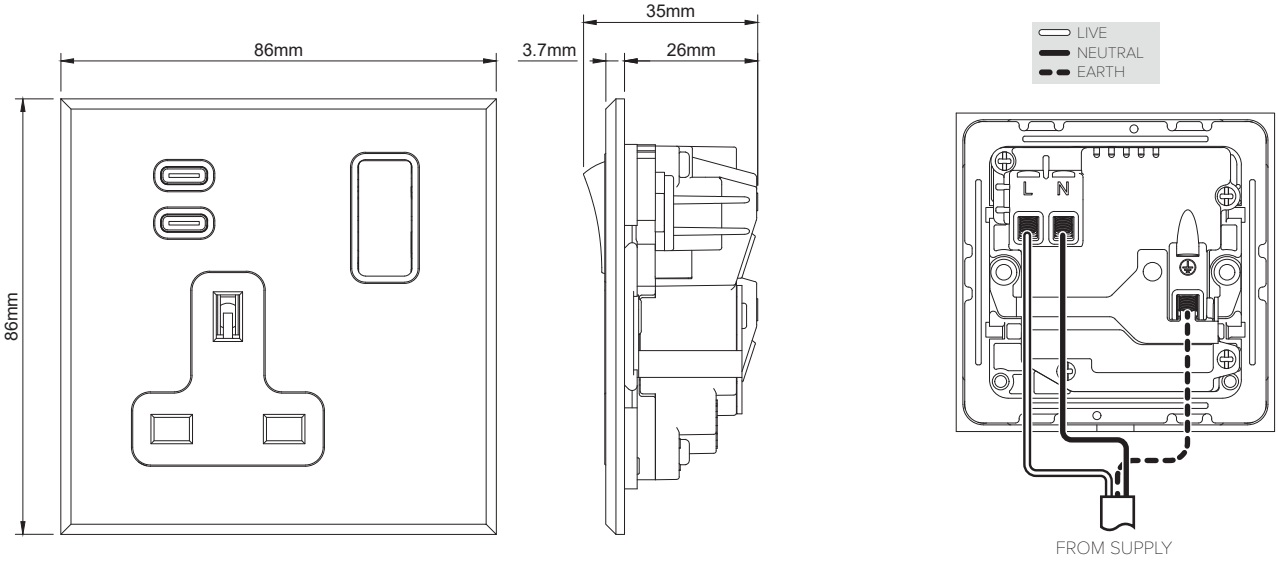

TECHNICAL SPECIFICATION

Standard(s)	BS 1363, BS EN 62368
Voltage Rating	13 Amp, 250V~
USB Voltage	5V ⎓
USB Output Amperage	3.1A Shared
Contact Gap	Normal Gap
Mounting Box Depth (Min)	35mm
Terminal Capacity	3 x 2.5mm², 3 x 4.0mm², 2 x 6.0mm²
Earth Terminal Capacity	3 x 2.5mm², 3 x 4.0mm², 2 x 6.0mm²
Outlet Protection Shutter	Yes
Fixing Centres	60.3mm
Size	86mm x 86mm x 35mm (3.7mm Plate thickness)
Product Class 1	Product must be earthed
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
IP Rating	IP2XD
Switched Poles	Double Pole
Mains Frequency	50hz - 60hz
Trademarks	The Soho Lighting Company is a registered trade mark number: UK00003313349, EU017906396, Date: 25 May 2018

All products listed conform to current British or European standard and the product information is correct at the time of going to press. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.

Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.

The Soho Lighting Company. Registered in England Number: 10797307. Copyright © 2018 All Rights Reserved.

Carbon Neutral Organisation

LIAQA ASSURED COMPANY

A COLLABORATION WITH:

HISTORIC ROYAL PALACES