


20AX Intermediate Toggle Module

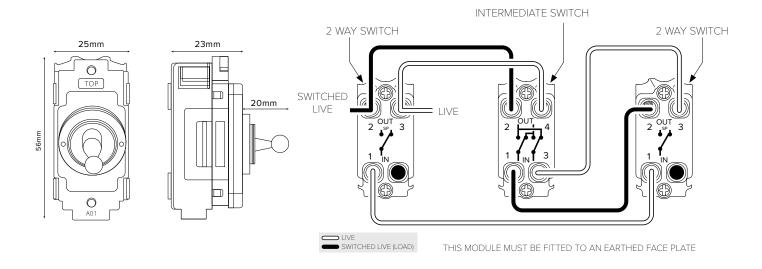

TECHNICAL SPECIFICATION

| Standard(s) | BS EN 60669-1 |
|-------------------------------|--|
| Voltage Rating | 20 Amp, 250V [~] (20AX − no derating for inductive or fluorescent loads) |
| Contact Gap | Normal Gap |
| Mounting Box Depth (Min) | 35mm |
| Terminal Capacity | 4x 1.5mm ² , 2x 2.5mm ² & 1x 4.0mm ² |
| Size | 56mm x 25mm x 403mm |
| Product Class 1 | Face plate must be earthed |
| Ambient Operating Temperature | -5° to +40°C |
| Recommended Location | Internal Use Only |
| Maximum Installation Altitude | 2000m |
| IP Rating | IP2XD |
| Switched Poles | Double |
| Mains Frequency | 50hz - 60hz |
| Contact Gap Minimum | 3mm |
| Trademarks | The Soho Lighting Company is a registered trade mark number: UK00003313349, EU017906396, Date: 25 May 2018 |

All products listed conform to current British or European standard and the product information is correct at the time of going to press. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. ue to manufacturing processes we cannot uarantee an exact colour match and shadings of ertain finishes.



The Soho Lighting Company. Registered in England Number: 10797307. Copyright © 2018 All Rights Reserved.